
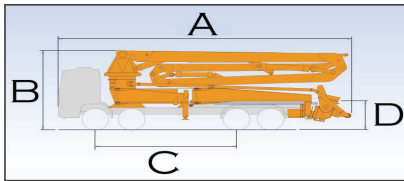


ROWLAND CONTRACTORS

Mobile Pump Specifications

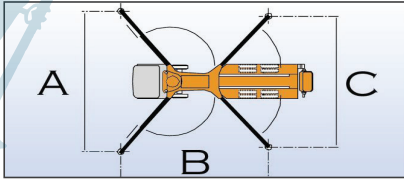

	28m	32m	33m	37m	38m	40m	45m	47m	50m	50m		
A	6.1	6.2	6.3	6.3	6.2	6.3	7.045	8.0	10.1	8.7		
B	7.23	7.3	7.85	7.1	8.2	8.5	8.06	8.5	11	9.62		
C	2.5	6.5	4	7.0	8.1	9.3	9.0	9.0	10	10.2		

	28m	32m	33m	37m	38m	40m	45m	47m	50m	50m		
A	10	11	11	12	12	12.5	12.5	12.8	13.5	12.8		
B	3.8	3.9	3.85	3.9	4	4	4	4	4	4		
C	4.725	5.2	5.025	5.4	6.3	6.5	6.5	6.0	6.5	6.5		
D	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.35	1.45	1.45		

	28m	32m	33m	37m	38m	40m	45m	47m	50m	50m		
MAXIMUM VERTICAL REACH (m)	28.15	31.8	33.15	37.15	38.00	40.17	45.17	47.0	50.05	50.0		
MAXIMUM HORIZONTAL REACH (m)	25	28	28	33	34	37	41	43	47	45.5		
MINIMUM OPENING HEIGHT (m)	5.8	6.1	8.5	9	8.7	9	9	9	9	9		
ROTATING ANGLE (degrees)	360	360	360	360	360	360	360	360	360	360		
TOTAL WEIGHT (T)	24	29.1	27.5	28.5	29.9	30	37	37.6	42	38.8		
WEIGHT PRESSURE ON FRONT RIGGERS (T)	16.5	20.5	16.5	16.5	22.0	22.5	28	27	27	30		
WEIGHT PRESSURE ON BACK RIGGERS (T)	16.5	20.5	16.5	16.5	22.0	22.5	28	26.5	27	30		

CONCRETE HOSE SIZE	2"	2.5"	3"	3.5"	4"
OUTSIDE DIAMETRE (mm)	60	85	110	120	130

